


Sorento


SRTDB9812

HEIGHT - ADJUSTABLE BASIN CABINET INSTALLATION MANUAL

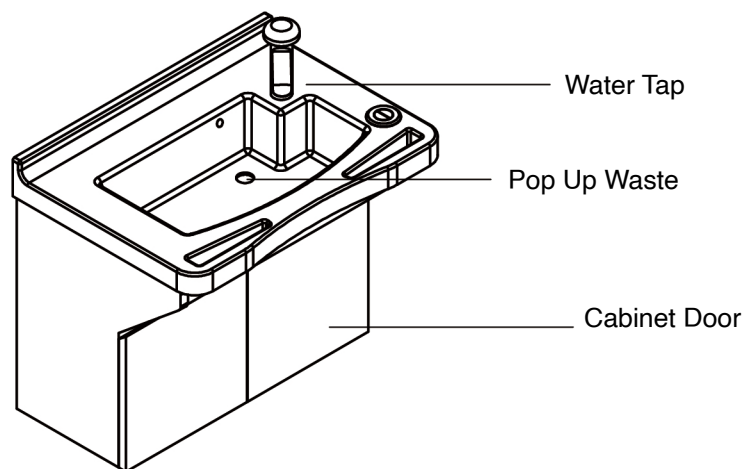


PARTS LIST

Basin Cabinet Parts

	Item	Figure	Qty
1	Cabinet Body		1 Set
2	Wall Fixing Screws		6 Pcs
	Expansion Plugs		6 Pcs

Wash Basin Parts

	Item	Figure	Qty
1	Wash Basin		1 Pcs

Mirror Cabinet Parts

	Item	Figure	Qty
1	Mirror Cabinet		1 Pcs
2	Mounting Brackets		2 Pcs
	Wall Fixing Screw		4 Pcs

SAFETY PRECAUTIONS

- Please read this installation manual carefully before installation and follow the instructions to ensure proper installation.
- After reading, keep it in a safe and easily accessible place for future reference.

**WARNING**

Failure to follow these instructions may result in serious injury or death.

**CAUTION**

Failure to follow these instructions may result in personal injury or property damage.





Indicates a prohibited action.



Indicates mandatory action

**WARNING**

After installing the wall-mounting screws, ensure the cabinet is secure, level ,and firmly fixed to the wall.
* Failure to properly install the wall-mounting screws may result in product damage or personal injury.
Before installation, ensure the wall is a load-bearing wall with a thickness of at least 80 mm. The wall must be able to withstand a pulling force of 300 kgf when applied to the front edge of the installed basin cabinet.
(You must use the supplied wall-mounting screws and expansion plugs.)

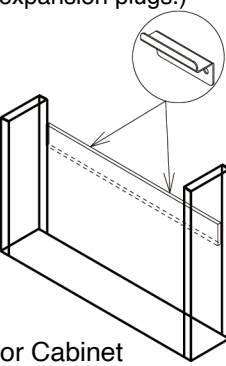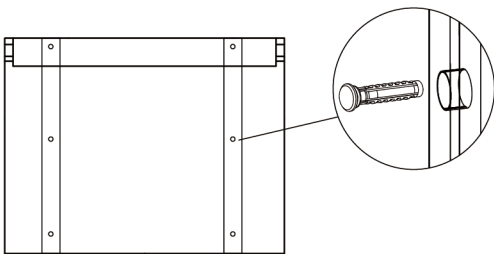


Cabinet Body

Mirror Cabinet




The basin must be securely bonded to the cabinet using silicone adhesive, with no looseness or movement.
* Otherwise, the basin may be damaged.
Neutral anti-mold silicone is recommended.

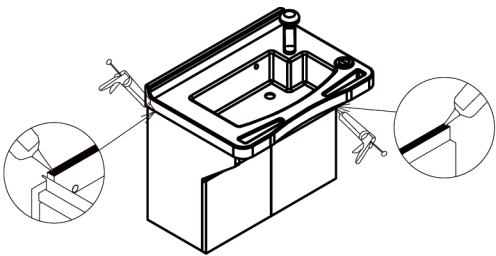

PRE-INSTALLATION NOTES

- This product must be used with a SORENTO-compatible wash basin.
- Refer to the installation diagram to confirm product placement and ensure sufficient installation clearance.
- The product features an adjustable height mechanism. Avoid installing it near electrical sockets to prevent hazards caused by excessive cord length during height adjustment.
- A splash-proof cover must be installed over the power socket to prevent water splash from causing a short circuit.
- Drainage options : Select the drainage method based on actual site conditions
- (1) Wall drainage or (2) Floor drainage.

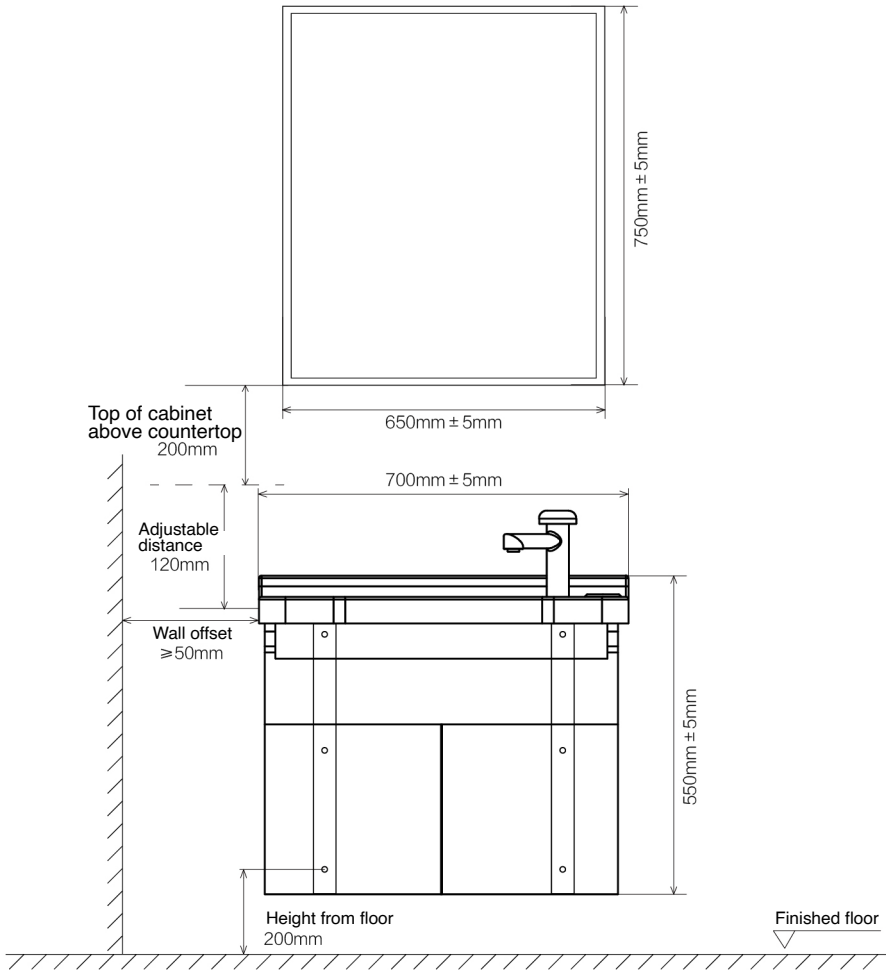

Technical drawing showing the dimensions and installation requirements for the cabinet.

Dimensions:

- Top of cabinet above countertop: 200mm
- Adjustable distance: 120mm
- Wall offset: $\geq 50\text{mm}$
- Height from floor: 200mm
- Finished floor
- Cabinet Body Width: $650\text{mm} \pm 5\text{mm}$
- Mirror Cabinet Width: $700\text{mm} \pm 5\text{mm}$
- Cabinet Body Height: $750\text{mm} \pm 5\text{mm}$
- Cabinet Body Depth: $550\text{mm} \pm 5\text{mm}$